


Dimension 尺寸图

Xmotor 2225EG

Small gliders special, e.g. RES, F5K

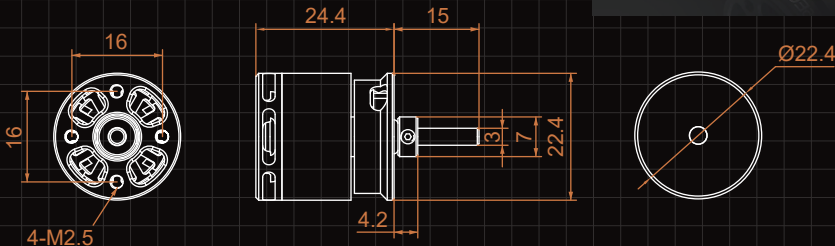

Specification 参数

NAME 型号	XM2225EG-14	XM2225EG-16	XM2225EG-23
SKU 商品编码	52081	52082	52083
RPM / V (KV) KV值	2700	2300	1600
Weight (g) 重量	32	32	32
Diameter (mm) 直径	D: 22.4	D: 22.4	D: 22.4
Length (mm) 长度	L: 24.4	L: 24.4	L: 24.4
Diameter of Shaft(mm) 轴径	3	3	3
Pitch of holes (mm) 安装孔距	16 / 16	16 / 16	16 / 16
Input Connectors 输入插头	GC2.0 3 Pairs	GC2.0 3 Pairs	GC2.0 3 Pairs
Slots & Poles 槽数, 极数	12N14P	12N14P	12N14P
I _o @10V(A)空载电流	1.30	1.10	0.65
Resistance(R _i)(mOhm) 电机内阻	43	62	115
No. of Cells(LiPo) 适用电池	2 ¹	2 ¹ ..3	2..3 ¹
Max. EfficiencyCurrent(A) 效率电流	13.5	12	9
Max. Burst Current (15S)[A] 峰值电流	27	24	18
Max. Power(15S)[W] 峰值功率	200	178	200
Torque (mNM) 扭矩	118	125	133
Recommended ESC 推荐调速器	XC-33U-Lite 15° (Middle)	XC-33U-Lite 15° (Middle)	XC-22U-Lite (15°)
Propeller 螺旋桨	2S: 6x4, 7x4, 8x4	2S: 7x4, 8x4, 8x5	2S: 9x5, 9x6, 10x6 3S: 7x4, 8x4, 8x5
Applications 适用级别	F5K/RES	F5K/RES	F5K/RES

注: ¹ Suggested working voltage(NOC) 建议工作电压(串联节数)
² Good throttle management needed 可在有效控制油门的情况下使用