


Dimensions

XM5015GB-SR

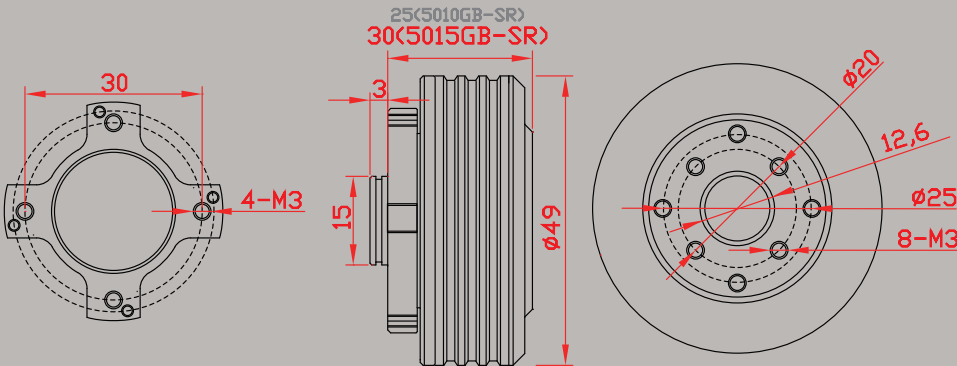

Specification

| Xmotor Brushless Gimbal Outrunner High end slip ring edition | XM5015GB-SR |
|---|--------------------------|
| Item NO. (商品编码) | 51337 |
| Weight (重量) | 150g |
| Motor dimension[DxL] (电机尺寸) | 49x30mm |
| Stator dimension[DxL] (定子尺寸) | 43.4x15mm |
| Configuration (配置) | 24N28P |
| Copper wire(OD) (铜线) | 0.25mm |
| Turns (圈数) | 60 |
| Winding type (盘式) | WYE |
| Max nominal voltage (最高电压) | 25V |
| Resistance(Ri) (电阻) | 13.8 Ohm |
| Idle current@10V (空载电流) | 92mA |
| Max.stall current (最大瞬间电流) | 2.1A |
| Diameter of Shaft (轴径) | ID =12.6mm Hollow |
| Length of Shaft (轴长) | N/A |
| Stator mounting holes[Pitch,Size] (定子安装孔) | 30mm, 4xM3 |
| Rotor mounting holes[Pitch, Size] (转子安装孔) | 20mm, 4xM3 25mm, 4xM3 |
| Flexible wire solder board (灵活的焊线板) | Y |
| Max.weight of gimbal/camera (云台或者相机的最大重量) | 2.4kg |
| Memo (备注) | Slip ring edition |